



1.2080 Tool Steel

1.2080 tool steel cut and delivered straight to your tool room.

1.2080 tool steel stockholders and suppliers, delivering to the whole of the UK.


West Yorkshire Steel supply 1.2080 flats cut from block and a limited range in diameters. A high carbon high chromium steel noted for its resistance to abrasion, it offers excellent dimensional stability in hardening. After heat treatment 1.2080 is hard, durable and dense, and is immune from sinking in use. It offers a measure of corrosion resistance when polished. In general, the applications of 1.2080 tool steel resemble those of 1.2379 but it should be remembered that 1.2080 has better wear resistance of the two steels and is preferred for such items as shear blades. Owing to its higher wear resistance, 1.2080 tool steel is slightly more difficult to grind than 1.2379.

Form of Supply

West Yorkshire Steel are stockholders and suppliers of 1.2080 tool steel flat sections. Rectangular pieces can be sawn from flat bar or block to your specific sizes as one offs or multiple cut pieces. As 1.2080 we have a limited range in round bar, [1.2436](#) tool steel grade is commonly offered in lieu when round bar sizes are not available. Ground tool steel bar can be supplied, providing a quality precision finish bar to close tolerances.

Applications

1.2080 is suitable for applications such as complex blanking and forming tools for long runs and for hard and abrasive materials. It is commonly used for other applications such as brick and tile mould liners, master hobs for cold hobbing plastic moulds, tableting punches and sleeves for corrosive powders.

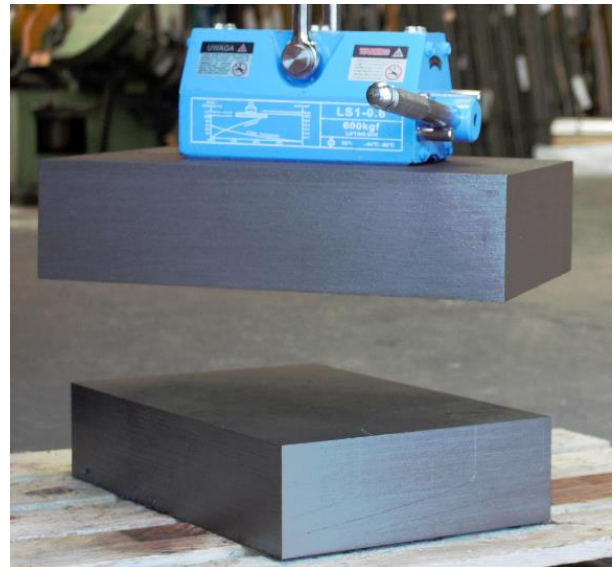

Contact our experienced sales team who will assist you with your enquiry.

- Sheet
- Flat
- Plate
- Diameter

Werkstoff tool steel grades we supply

[1.2080](#) | [1.2083](#) | [1.2311](#) | [1.2312](#) | [1.2344](#)
[1.2363](#) | [1.2379](#) | [1.2436](#) | [1.2510](#) | [1.2550](#)
[1.2767](#) | [1.2842](#) | [1.3343](#)

Typical Analysis

Carbon	1.90-2.20%	Chromium	11.00-13.00%
Manganese	0.20-0.60%	Sulphur	0.03% max
Silicon	0.10-0.60%	Phosphorous	0.03% max

Ground Flat Stock

Precision ground flat stock / gauge plate can be produced using 1.2080 tool steel. Subject to size suitability and availability pieces can be produced in approximately 2 to 3 weeks. Standard and non-standard sizes are available.

Forging

Pre-heat at 900-950°C then raise temperature to 1050-1100°C. Soak until uniformly heated. 1.2080 tool steel is relatively hard at elevated temperature. Therefore, initial hammer blows must be light and the temperature must not be allowed to fall below 1020°C until the metal begins to flow. Final forging should not be done below 900°C.

Annealing

1.2080 is supplied in the annealed and machinable condition. Re-annealing will only be necessary if the steel has been forged or hardened by the toolmaker. To anneal, heat slowly and uniformly to 900°C. Soak for three to four hours and allow to cool in the furnace to room temperature. Re-heat to 800-1040°C and again soak for three to four hours. Allow to cool in the furnace to room temperature.

Stress Relieving

When tools are heavily machined, ground or otherwise subjected to cold work, the relief of internal strains is advisable before hardening to minimise the possibility of distortion. Stress relieving should be done after rough machining. To stress relieve, heat the steel component to 600-650°C. Soak well and cool in the furnace or in air. The tools may then be finish machined before hardening.

Hardening

It is preferable to heat the tools in a controlled atmosphere. If this is not possible, pack hardening is recommended. A reducing atmosphere is desirable. Pre heat the component to 750-800°C. and allow to soak at this temperature. Raise to the hardening temperature of 950-980°C. Soak thoroughly at the temperature for thirty minutes per 25mm of ruling section, then cool or quench accordingly.

Martempering

It is preferable to heat the tools in a controlled atmosphere. If this is not possible, pack hardening is recommended. A reducing atmosphere is desirable. Pre heat the component to 750-800°C. and allow to soak at this temperature. Raise to the hardening temperature of 950-980°C. Soak thoroughly at the temperature for thirty minutes per 25mm of ruling section, then cool or quench accordingly.

Tempering

Double tempering is recommended. Tempering should be done with the least possible delay after hardening, preferably when the tools are still hand warm. Select a suitable tempering temperature, bearing in mind the service requirements. Heat slowly and uniformly. When the component has reached the desired temperature, soak for at least one hour per 25mm of thickness. The second tempering should be a repetition of the first.

Temperature °C	150	200	300	400	500
Hardness HRc	64-63	62-61	60-59	59-58	56-55

Final Grinding

Select the correct grade of wheel in consultation with the grinding wheel manufacturer. Ensure the grinding wheel is in good condition by means of a suitable dressing tool. Wet grinding is a preferable option using a copious supply of coolant. If dry grinding is resorted to then use a very soft wheel.

Heat Treatment

Heat treatment temperatures, including rate of heating, cooling and soaking times will vary due to factors such as the shape and size of each steel component. Other considerations during the heat treatment process include the type of furnace, quenching medium and work piece transfer facilities. Please consult your heat treatment provider for full guidance on heat treatment of tool steels.

Quality Assured Supply

1.2080 tool steel is supplied in accordance with our ISO 9001:2015 registration.



West Yorkshire Steel Ltd
Sandbeck Industrial Estate,
Wetherby, Leeds,
LS22 7DN UK

Call: 01937 584440
Fax: 01937 580128
Email: sales@westyorkssteel.com



QUOTE ME



Information provided on our datasheets has been drawn from various recognised sources, including British, European and International Standards, recognised industry references (printed & online) and manufacturers' data. No guarantee is given that the information is from the latest issue of those sources or about the accuracy of those sources. Material supplied by the Company may vary significantly from this data but will conform to all relevant and applicable standards. Any of the products detailed may be used for a large range of purposes and as WYS has no control over their use; WYS specifically excludes all conditions or warranties expressed or implied by statute or otherwise as to dimensions, properties and/or fitness for any particular purpose, whether expressed or implied. © West Yorkshire Steel Ltd. All Rights Reserved.