

## BS4659 BO1 Tool Steel

Quality BO1 tool steel cut and delivered straight to your tool room, whatever size you need.

### BS4659 BO1 tool steel stockholders and suppliers, delivering to the whole of the UK.


West Yorkshire Steel are stockholders and suppliers of BS4659 BO1 tool steel round bar, flat bar and plate. This grade is an oil hardening tool steel type supplied in the annealed condition. BS4659 BO1 tool steel offers good durability, gives excellent wear resistance and holds a good cutting edge. With these properties it is an excellent general purpose tool steel often used where the expense of a high carbon high chromium tool steel would not be justified.

### Popular [tool steel](#) grades we supply

[BD2](#) | [BD3](#) | [BO2](#) | [BA2](#) | [BS1](#) | [BH13](#) | [BP30](#) | [BP20](#) | [BM2](#) | [BM35](#) | [BM42](#)

### Form of Supply

West Yorkshire Steel are stockholders and suppliers of BS4659 BO1 tool steel round bar, flat bar, plate and block. Diameters can be sawn to your required lengths as one offs or multiple cut pieces. Rectangular pieces can be sawn from flat bar or plate to your specific sizes. BS4659 BO1 ground tool steel bar can be supplied, providing a quality precision ground bar to your required tolerances. Ground tool steel bar can be supplied, providing a quality precision finish bar to close tolerances

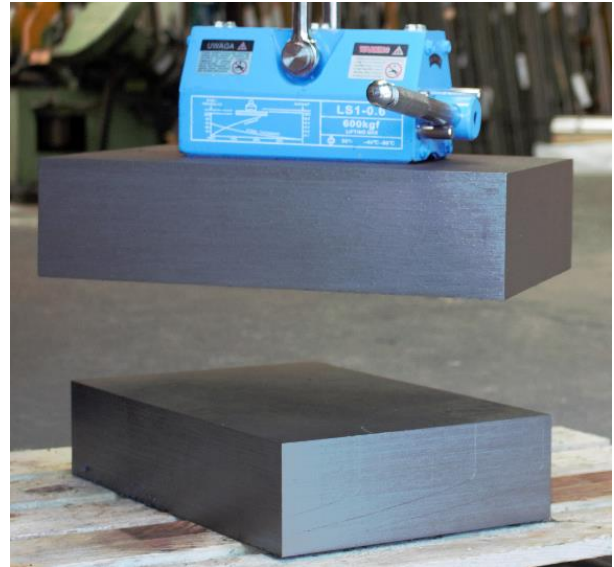

Contact our experienced sales team who will assist you with your enquiry.

- Sheet
- Flat
- Plate
- Diameter

## Applications

Typical applications for BS4659 BO1 tool steel include medium run dies, intricate press tools, drawing punches, broaches, bushings, lathe centres, chuck jaws, master cavity sinking hobs, paper cutting machine knives, plug gauges, thread gauges and precision measuring tools. Also commonly used in applications such as cams, cloth cutting knives, cold taps, reamers, collets, cutting hobs, strip slitting cutters, trimmer dies, tube expander rolls, plastic moulds and woodworking knives.

## Typical Analysis

Carbon	0.95%	Chromium	0.50%
Manganese	1.25%	Tungsten	0.50%
Vanadium	0.20%		

## Ground Flat Stock

Precision [ground flat stock / gauge plate](#) can be supplied in BS4659 BO1 tool steel. Stocks are available in a wide range of sizes. Metric sizes are supplied in 500mm and 1000mm lengths. Imperial sizes are supplied in 18" and 36" lengths. Subject to size suitability and availability non standard sizes and lengths can be produced in approximately 2 to 3 weeks.

## Forging

Heat slowly and begin forging at 980-1000°C. Do not forge below 800°C. After forging BS4659 BO1 tool steel, cool slowly preferably in a furnace.

## Annealing

BS4659 BO1 is supplied in the annealed and machinable condition. Re-annealing will only be necessary if the steel has been forged or hardened by the tool maker. To anneal, heat the BS4659 BO1 tool steel slowly to 740-760°C, soak well and allow to cool in the furnace to 500°C or below, before withdrawing. Annealed hardness will be about 229 Brinell.

## Stress Relieving

When parts are heavily machined, ground or otherwise subject to cold work, stress relieving will be beneficial prior to hardening. Heat the BS4659 BO1 steel component carefully to 670-700°C, soak well and allow to cool in air.

## Hardening

Heat slowly and if possible pre heat at 300-500°C before raising to the hardening temperature of 780-820°C. Pre heating is especially desirable for complex sections. Soak thoroughly allowing 30 minutes per 25mm of ruling section before quenching. Light sections should be quenched in oil from the lower end of the hardening temperature range. Tempering is always necessary after hardening.

## Martempering

Martempering is an alternative hardening procedure which may be used when suitable salt bath equipment is available. By this method internal strain, distortion and risk of quench cracking are reduced to a minimum. Pre heat at 360°C then increase the heat to 800°C for sections 3mm thick or less, or to 820°C for sections over 3mm thick. Soak according to section then quench into molten salt, held at 210°C. Allow sufficient time for the centre of the piece to reach bath temperature, withdraw and cool in the air. Tempering will then be necessary. Hardening from a neutral salt bath, will reduce the possibility of scaling or decarburisation. Heat to 830-850°C and after equalisation quench in oil.

## Tempering

Temper between 100°C and 350°C. Soak well at the selected temperature and soak for at least one hour per 25mm of total thickness.

Temperature °C	100	150	200	250	300	350
Hardness HRc	64-63	63-62	62-61	60-59	58-57	56-55

## Heat Treatment

Heat treatment temperatures, including rate of heating, cooling and soaking times will vary due to factors such as the shape and size of each BS4659 BO1 steel component. Other considerations during the heat treatment process include the type of furnace, quenching medium and work piece transfer facilities. Please consult your heat treatment provider for full guidance on heat treatment of tool steel grades.

## Final Grinding

Select the correct grade of wheel in consultation with the grinding wheel manufacturer. Ensure the grinding wheel is in good condition by means of a suitable dressing tool. Wet grinding is a preferable option using a copious supply of coolant. If dry grinding is resorted to then use a very soft wheel.

## Quality Assured Supply

BS4659 BO1 tool steel is supplied in accordance with our ISO 9001:2015 registration.



**West Yorkshire Steel Ltd**  
Sandbeck Industrial Estate,  
Wetherby, Leeds,  
LS22 7DN UK

Call: 01937 584440  
Fax: 01937 580128  
Email: [sales@westyorkssteel.com](mailto:sales@westyorkssteel.com)



**QUOTE ME**



Information provided on our datasheets has been drawn from various recognised sources, including British, European and International Standards, recognised industry references (printed & online) and manufacturers' data. No guarantee is given that the information is from the latest issue of those sources or about the accuracy of those sources. Material supplied by the Company may vary significantly from this data but will conform to all relevant and applicable standards. Any of the products detailed may be used for a large range of purposes and as WYS has no control over their use; WYS specifically excludes all conditions or warranties expressed or implied by statute or otherwise as to dimensions, properties and/or fitness for any particular purpose, whether expressed or implied. © West Yorkshire Steel Ltd. All Rights Reserved.